





SA3-C-075-S-210-M	
Brand Name	Paragon SESIoN.i
Driver Type	TL82/66°C
Output Model	Constant Current
Input Voltage	347Vac
Input Frequency	60Hz
Status	Canada Active

Electrical Specifications

Output Power Max. (W)	Output Voltage (V)	Output Current (A)	Min. Start Temp. (°F/°C)	Tease Temp. Max. (°F/°C)	Input Current (A)	Input Power (W)	THD Max. (%)	Power Factor Min.	Typical Efficiency (%)
80	28-36	1.15-2.2	-40/-40	194/90	0.29@347V	95	20	0.9	89

Wiring Diagram

Enclosure

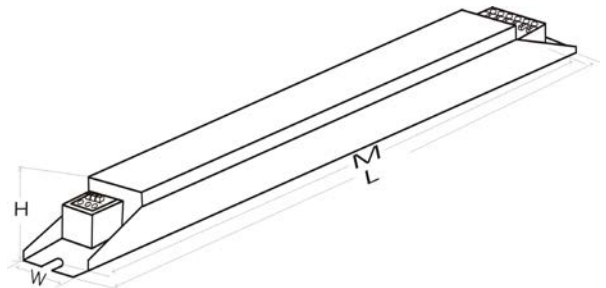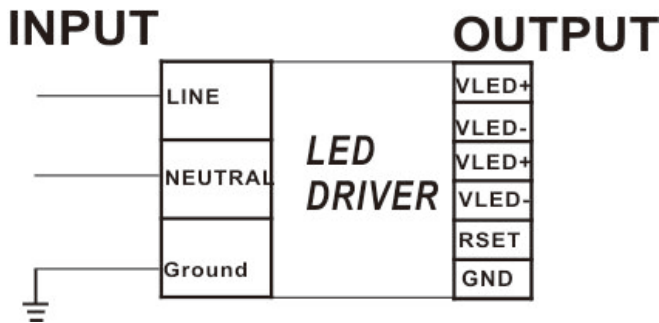


	in.	cm.		in.	cm.
Black			Yellow/Blue		
White			Blue/White		
Blue			Brown		
Red			Orange		
Yellow			Orange/Black		
Gray			Purple		

Over All(L)	Width(W)	Height(H)	Mounting(M)
39.5cm	3.8cm	3.1cm	38.7cm
15.55"	1.49"	1.2"	15.23"

RSET table

Rset(Ω)	Iout(mA)	Rset(Ω)	Iout(mA)
>4.7k	2200	2.1k	1420
4.7k	2200	1.8k	1150
3.9k	2000		
3.3k	1840		
2.7k	1650		

Maximum Wiring Distance(at full load) is 18AWG/300 Feet

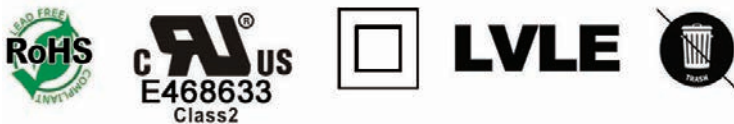

Revised 2014/11/11

Data is based upon tests performed by Sol IV Semiconductor in a controlled environment and representative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted

Sol IV Semiconductor 227 Wilkinson Brampton ON L6T 4M2 Canada

TEL: (+1) 416-800-0985
http://www.SolIVSemi.com

FAX: (+1) 416-800-1053
E-mail: CRM@SolIVSemi.com